

TABLES 18, 19 & 20**Utility Service; Regular, Extended, and Crew Cab, 4X2 and 4X4**

The truck specified shall be furnished with an open (without roof) utility service body with applicable equipment. The body and cabinetry shall be constructed of corrosion resistant A40 galvannealed minimum, or other specified material such as all fiberglass (code FG), or all aluminum (code AL), each constructed with strength equal to steel. Units other than steel shall generally conform to the dimensional, layout, performance, and design specified herein, with the exception of basic body material used to accomplish the objectives (e.g. safety tread steel plate floor or equal, etc.). The body shall have a center load compartment with cabinets on each side. Service bodies shall be a body manufacturer's commercial model as represented in the manufacturer's current technical data and as required herein. The body shall include, but not be limited to, the body manufacturer's furnished locks, latches, hinges, wiring harnesses, flush mounted lights, all mounting hardware and components. Items normally furnished by the chassis manufacturer, such as but not limited to fuel system fill components, shall be used for integrating the body with the chassis. Body installers shall fully conform to body and chassis manufacturer's instructions and recommendations.

The body shall be the low profile type with dimensions as shown in Table A and with a minimum load space height of 48 cm (19 in) except where otherwise required.

Load compartment floor thickness shall be of not less than 12 gage (2.7 mm (0.1046 in)) galvanneal safety tread steel plate. Bulkhead shall be constructed to a minimum height of 48 cm (19 in) above the load space floor, and shall be not less than 16 gage (1.5 mm (0.0598 in)) galvanneal, reinforced for rigidity. When body is made of aluminum, the minimum strengths shall be furnished and the floor shall be a minimum of 3.2 mm (0.125 in) 5086-H34 and bulkhead shall be a minimum of 2 mm (0.080 in) 5052-H32 aluminum and including reinforcement for rigidity. When a telescoping roof is specified (code U'TR), the bulkhead shall be constructed to full height of cabinets. The bulkhead shall be capable of withstanding a horizontal static load equal to 1/2 the payload capacity of the vehicle without permanent distortion. On fiberglass bodies the cab guard shall be steel or aluminum. The guard shall be at least the width of the load space and the height of the cab and include openings for rear visibility.

Tailgate shall be constructed of not less than 16 gage (1.5 mm (0.0598 in)) double paneled or 14 gage (1.9 mm (0.0747 in)) single panel galvanneal, reinforced for rigidity. Tailgate shall be hinged and equipped with supports for retention in horizontal position and when in the horizontal position shall be aligned flush or slightly lower than floor level. Tailgate shall be minimum 23 cm (9 in) high. Aluminum tailgates shall be double paneled construction from a minimum 2 mm (0.080 in) material or single panel 2.3 mm (0.090), reinforced for rigidity.

Cabinet headers shall be not less than 14 gage (1.9 mm (0.0747 in)) galvanneal. Cabinet backs and partitions shall be of not less than 16 gage (1.5 mm (0.0598 in)) galvanneal steel.

**TABLE A – Low Profile Utility Service Body,
Additional Dimensions (cm (in))**

COMPONENT	SINGLE REAR WHEELS	DUAL REAR WHEELS
Cab to axle.....	as specified (see 3.6.4.1)
Overall length	see tables 18, 19, and 20
Overall body width, min/max (3.6.15)	193 (76)/203 (80)	218 (86)/228 (90.5) on narrow axle 235 (92)/244 (96) on wide axle
Load space:		
Width (excluding wheel housing), min	123 (48.4)	123 (48.4), opt. 127 (50) code XW
Height, min./max	48 (19)/62 (24.5) max.	48 (19)/62 (24.5) max.
Cabinet space:		
Height at front, min/max	89 (33)/99 (39) max	89 (35)/99 (39) max.
Height at rear, min/max	79 (31)/99 (39) max	79 (31)/99 (39) max.
Depth,* min	35 (14)	46 (18)
Volume (Each side)	see tables
*Excluding structural cutouts		

TABLE B
Tables 18, 19 & 20
Utility Service Body with Superstructure

MINIMUM DIMENSIONS (cm (in))		
Rear-of-cab to rear-axle dimension Overall length of body Overall width of body	std as specified as specified (see 3.6.15)	
Load space: Width (exclusive of wheel wells)	123 (48.4) opt. 137 (54) code XW	
Height	137(54) single 152 (60) dual	
Extra height	180 (70) Opt USS2	
Cabinet space:		
Height at front	99 (39)	
Height at rear	89 (35)	
Width	36 (14) single 46 (18) dual	
Volume, side, m ³ (in ³)	.65 (40,000)	
Racks over cabinets:		
Height	56 (22)	
Width	19 (7.5)	
Door opening at rear:		
Height	132 (52) single 140 (55) dual	
Width	122 (48)	

Cabinet shelves shall be capable of supporting a minimum of 91 kg (200 lb) each when supported no more than 10 cm (4 in) from each end of the shelf. Cabinet doors shall be double panel constructed from not less than 20 gage (0.9 mm (0.0359 in)) galvanized, with reinforcement. Aluminum doors shall be double panel construction from a minimum 1.6 mm (0.063 in), 5052 H32 material. Aluminum and fiberglass body shall have cabinet material and construction of the same material(s) as the rest of the body. Strength of finished cabinets shall be at least equal to that of steel construction. The steel cabinet interior shall be prepared, primed, and painted with a light colored semi-gloss or flat gray finish paint (not a primer finish), except that galvanized coated steel shelves need not be painted. Cabinet arrangement shall include two vertical cabinets and one horizontal cabinet on each side of the body as follows:

- (A) One full height vertical cabinet with not less than two removable shelves on each side of body front.
- (B) One horizontal cabinet with a minimum of five adjustable partitions to form small bins on the curbside of the body. If a single shelf is used, it shall be full width.
- (C) One horizontal cabinet with not less than one full length tray on the street side of the body.
- (D) A full height vertical cabinet to the rear of the wheel housing on each side of the body with a minimum of one adjustable shelf.

Cabinet doors shall provide access to all portions of each cabinet, and door closures shall be weatherproof incorporating an automotive tubular type neoprene sealing system. Doors shall have full length continuous rod or hem type heavy-duty hinges, with stainless steel hinge pins or stainless steel, bronze, or nylon insert sockets. Latches shall have recessed handles. All doors shall be provided with cylinder type locks, operable from the same key but having various combinations of cylinder locks, as available, between vehicles on multi-unit contracts. Moving parts of latches and locks shall be constructed of, or plated with corrosion-resistant material. All vertical doors shall be furnished with double spring loaded stays to facilitate both hold open and closing, and doors shall not interfere with each other when open. Horizontal doors shall have two (2) removable pivoting supports to hold open in the 90 degree position and be reinforced so as to permit their use as a shelf. Latches, hinges, and striker plates shall be non-welded, easily replaced, and striker plates shall be readily adjustable. Fiberglass bodies shall be reinforced in the latch and hinge hardware areas.

TABLE 18: Utility Service, Regular Cab, 4X2 and 4X4

The vehicle shall meet the requirements previously shown for utility service trucks. The vehicle shall be provided with a 2 door regular cab.

The equipment listed below shall be the minimum furnished on all vehicles listed in this table.

		4 X 2		4 X 4	
ITEM NO.		82	83	84	84B
PAYOUT min., KG (LB)		1360 (3,000)	1496 (3,500)	1905 (4,200)	3563 (7,900)
GWWR Min./Max., KG (LB)		3900 (8,600)/ 4,081 (9,000)	4172 (9,200) 4,489 (9,900)	4,988 (11,000) 5,668 (12,500)	6802 (15,000) 7,482 (16,000)
Engine, min. CD/cyl.	5.4 L/8	5.4 L/8	5.4 L/8	6.8 L/8-10	6.8 L/8-10
Transfer case	N/A	N/A	N/A	N/A	2 spd.
Suspension/shocks	HDA	HDA	HDA	HDA	HDA
Hubs, fit wheels locking	N/A	N/A	N/A	N/A	OEM std.
Wheels, dia.	16 in. / single	16 in. / single	16 in./ dual rear	19.5 in. / dual rear	16 in. / single dual rear
Tires, type/tread, min.	LT245/R/AS	LT215/R/AS	Commercial 235/85R AS-	Commercial 225/70RAS	LT235R/AT
Alternator/battery	130A/.600CCA	130A/.600CCA	130A/.600CCA	130A/.650CCA	130A/.600CCA
Fuel capacity, min., L (GAL)	113 (30)	113 (30)	113 (30)	113 (30)	113 (30)
Body, utility, style	low-open	low-open	high-open	low-open	low-open
Size M (FT)	2.4 (8)	2.4 (8)	2.7 (9)	2.4 (8)	2.4 (8)
Cabinet vol. per side, M3 (IN3)	.47 (29,000)	.62 (38,000)	.62 (74,000)	.47 (29,000)	.62 (38,000)
Mirrors	low mount	RM	RM	low mount	RM
Body mounting	std.	std.	std.	ORM	ORM

Style, Cab - 2 Door, Std	Seating capacity, min. - 3 pass.
Wheelbase - as reqd. for proper load distribution	Bumper, rear type - HD Step
Engine type - Gas	Radio - AM/FM
Transmission / Automatic	Air conditioning
Differential, ratio - OEM std.	Intermittent wipers
Brakes, Type - Power/ABS	Rubber floor covering
Steering - Power	RH2 trailer hitch provisions (1.9 cm [7.5 in.] hole)
Vinyl upholstery	
Supplemental restraint system	
Split bench seat	

** Indicates sole source item.

REPRESENTATIVE VEHICLES

4 X 2					
ITEM:	82	83	84	84B	84D
FORD (F)	F250	F350 (NA w/T6 and STD ENG in CA)	F450 (NA w/STD ENG and T6 in CA)	F550	
GM (G)	C2500	C2500HD	C3500	C4500	C5500
Body Length	Model Codes				
2.4 m (8 ft.)	Ford (F) GM (G)	F20w66D C25903wZW9	F30w66D C25903HD	-	-
2.7 m (9 ft.)	Ford (F) GM (G)	F34	F36 C3603	F46 C4C042	F56 C5C042
3.4 m (11 ft.)	Ford GM	-	-	F46 C4C042	F56 C5C042
3.8 m (12.5 ft.) (req CA1)	Ford GM	-	-	F46 C4C042	F56 C5C042

4 X 4

4 X 4					
ITEM:	87**	88	89A	89B**	89D**
FORD(F)	F250	F350 (NA w/T6 and STD ENG in CA)	F350 (NA w/T6 and STD ENG in CA)	F350 (NA w/T6 and STD ENG in CA)	F450 F550
GM (G)			K2500HD	K3500	-
Body length	Model Codes				
2.4 m (8 ft.)	Ford GM	F26w/66D	F31w/66D K25903HDw/ZW9	-	-
2.7 m (9 ft.)	Ford GM	-	F35	F38 K36003	F47 F57
3.4 m (11 ft.)	Ford GM	-	-	-	-
3.8 m (12.5 ft.)	Ford GM	-	-	-	-

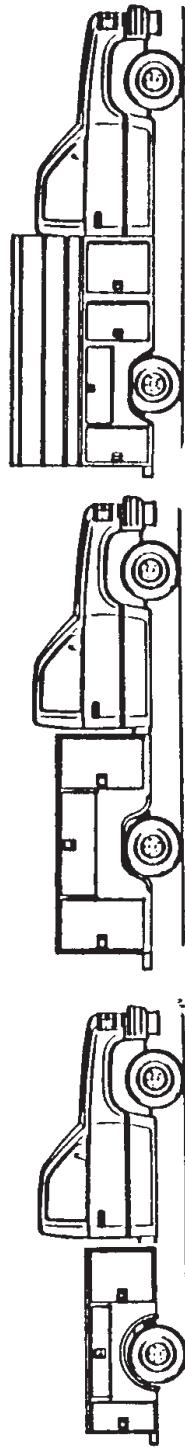


TABLE 18: Utility Service, Regular Cab, 4X2 and 4X4


TABLE 18: Utility Service, Regular Cab, 4X2 and 4X4

OPTION CODES	4 X 2				4 X 4				89D**
	82	83	84	84B	84D	87	88	89A	
AL Aluminum maintenance body	0	0	0	0	0	0	0	0	0
AT All-terrain/on-off road tires	0	0	0	-	-	S	S	-	-
B09 Service body 2.7m (9 ft.) req. CA6	-	0***(F)	S	-	-	0***(F)	S	S	-
B11 Service body 3.3m (11 ft.) req. CA8	-	-	0	S	-	-	0	S	-
B12 Service body 3.8m (12.5 ft.) req. CA1	-	-	-	0	-	-	-	0	0
BBM Front bulkhead/cab guard	0	0	0	0	0	0	0	0	0
BF Solid body bench	0***(F)								
BHP High profile body	0	0	0	S	S	0	0	0	S
BUA Backup alarm	0	0	0	0	0	0	0	0	0
CA1 - 274 cm (108 in.) cab to axle (CA)	-	-	0	-	-	-	-	-	0
CA6 - 152 cm (60 in.) cab to axle (CA)	-	0***(F)	S	S	-	0***(F)	S	S	-
CA8 3.4m (11 ft.) body with 212 cm (84") CA	-	-	0	S	-	-	-	0	S
CM Carpeted floor covering	0	0	0	0	0	0	0	0	0
CNS Consignee delivery	0	0	0	0	0	0	0	0	0
CRTS Cruise control/tilt steering	0	0	0	0	0	0	0	0	0
CU Cloth upholstery	0	0	0	0	0	0	0	0	0
D3 Special traction, rear	0	0	0	0	0	0	0	0	0
D7 Towing/mountain ratio	0	0	0	0	0	0	0	0	0
DA Delete air conditioning	0	0	0	0	0	0	0	0	0
DRL Daytime running lights	0	0	0	0	0	0	0	0	0
E5 Eight/tent cylinder, extra power, min. 6.8 L.	0	0	S	S	0	0	0	S	S
EH Block heater, OEM (std. with Y'D)	0	0	0	0	0	0	0	0	0
FG Fiberglass maintenance body	0	0	0	0	0	0	0	0	0
FTH Front tow hooks (S GM4x4)	-	-	-	-	0	0	0	0	0
HTG Hydraulic lift gate N/A Ford w/8 ft. body	0	0	0	0	0	0	0	0	0
HTP Power close/lift gate req. 9 ft. or longer body	-	0***(F)	0	0	-	0***(F)	0	0	0
J560 7-way trailer electrical receptacle	0	0	0	0	0	0	0	0	0
MBG Brush guard, front	0	0	0	0	0	0	0	0	0
MHP Pipe and conduit holder (requires UOR or URO)	0	0	0	0	0	0	0	0	0
MIL Military data plate	0	0	0	0	0	0	0	0	0
MPS Snow plow, reversible	-	-	-	-	0	0	0	0	0
MRS Strobe type warning light	0	0	0	0	0	0	0	0	0
ORM Off-road body mounting	0	0	0	0	0	S	S	S	S
PCI Paint compartment interior same as body exterior	0	0	0	0	0	0	0	0	0
PSM Parts and service manuals	0	0	0	0	0	0	0	0	0
PT PTO opening req. E5	0***(F)	0	0	0	0	0	0	0	0
PWL Power windows and locks	0	0	0	0	0	0	0	0	0
RACS AM/FM/radio w/integral cassette player	0	0	0	0	0	0	0	0	0
RAD AM/FM/radio w/integral CD player	0	0	0	0	0	0	0	0	0
RS Reclining bucket/captains chair seats	0	0	0	0	0	0	0	0	0

OPTIONAL EQUIPMENT:

O = Option available O** = Sole source

S = Standard on specified item

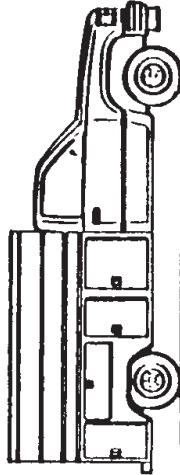

** Indicates sole source item.

OPTIONAL EQUIPMENT: (continued)

O = Option available O= Sole source S = Standard on specified item**

OPTION CODES	4 X 2				4 X 4				89A 89B** 89D*
	82	83	84	84B	84D	87	88	89A 89B** 89D*	
RH4 Class 4 draw bar receiver, (OEM)	0	0	0	0	0	0	0	0	0
RKE Remote keyless entry	0	0	0	0	0	0	0	0	0
RM Camper mirrors	0	0	S	S	0	0	0	S	S
SK Metric odometer	0	0	0	0	0	0	0	0	0
SP Skid plates	-	-	-	-	0	0	0	0	0
SRG Sliding rear window	0	0	0	0	0	0	0	0	0
SZ Snowplow prep. package, OEM	-	-	-	-	0	0	0	0	0
T5 Manual transmission	0(N/A F)	0***(G)	0(N/A F)	-	-	0***(C)	0(N/A F)	-	-
T6 6 speed manual transmission (G REQ E5 or YD)	0(N/A G)	0	0	0	0	0	0	0	0
TT Traction tread rear tires (commercial tires)	-	-	0	0	-	-	-	S	S
UFT Top opening compartments (N/A w/FG, AL, USS, UTR, UPR)	0	0	0	0	0	0	0	0	0
ULCL Long horizontal compartment - left	0	0	0	0	0	0	0	0	0
ULCR Long horizontal compartment - right	0	0	0	0	0	0	0	0	0
UOR Overhead racks w/ Ladder clamps (N/A w/USS)	0	0	0	0	0	0	0	0	0
UPR Pipe rack on top right side	0	0	0	0	0	0	0	0	0
URH Rope hooks	0	0	0	0	0	0	0	0	0
USM Side mounted ladder rack (w/USS, USS2 only)	0	0	0	0	0	0	0	0	0
USS Superstructure, closed body (requires BHP)	-	0	0	0	0	0	0	0	0
USS2 Superstructure, extra height (requires BHP)	-	0	0	0	-	0	0	0	0
UTC Tire carrier, vertical in load space cover (N/A w/UTR)	0	0	0	0	0	0	0	0	0
UTR Telescoping load space cover	0	0	0	0	0	0	0	0	0
UVB Vise bracket and pipe rest	0	0	0	0	0	0	0	0	0
WA Wide track rear axle	-	0	-	-	0	-	0	-	-
XW Extra wide load space, min 140 cm (54 in.), includes WA, RM	-	0	-	-	-	0	-	-	-
YD Diesel engine, turbocharged (EH std.)	0***(F)	0	0	0	0	0	0	0	0

NOTE: It is highly recommended that option D3, special traction rear axle, be ordered for vehicles frequently used in 4 wheel drive application.

**Indicates sole source item.



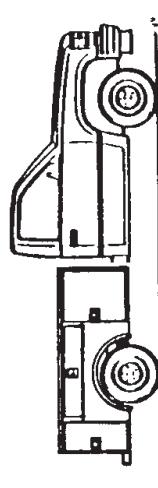


TABLE 18: Utility Service, Regular Cab, 4X2 and 4X4

TABLE 19: Utility Service, Extended Cab, 4X2 and 4X4

The vehicle shall meet the requirements shown previously for utility service trucks. The vehicle shall be provided with a 4 door extended cab.

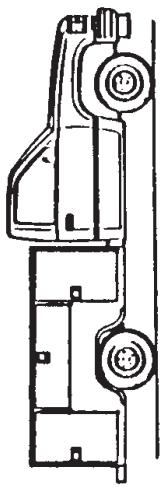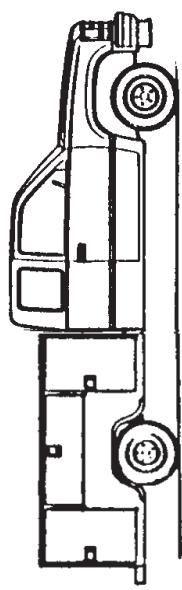

^aThe equipment listed below shall be the minimum furnished on all vehicles listed in this table.

Style, Cab - 4 Door, Std	Cooling system - HDA		
Wheelbase - as required for proper load distribution	Fuel capacity, min. in, L (Gal) - 113 (30)		
Engine type - Gas	Seating capacity, min - 4 Pass.		
Transmission - Auto	Bumper, rear type - HD Step		
Differential, ratio - OEM std.	Radio - AM/FM		
Suspension/Shocks - HDA	Air conditioning		
Brakes, Type - Power - All wheel ABS	Intermittent wipers		
Steering - Power	Supplemental restraint system		
Rubber floor covering	Vinyl upholstery		
Split bench front seat			
4 X 2			
ITEM NO.	82C**	84C	87C**
PAYOUTLOAD min, kg (lb)	1405 (3,100)	1179 (2,600)	1179(2,600)
GVWR min./max, kg (lb)	3900 (8,600)/ 4081 (9,000)	4173 (9,200)/ 4489 (9,900)	3900 (8,600)/ 5668 (12,500)
Cab to axle (CA) cm (in.)	142 (56)	142 (56)	142 (56)
Engine, min. CD/cyl.	5.4L/8	5.4L/8	5.4L/8
Transfer case	N/A	N/A	2 spd.
Suspension/shocks	HDA	HDA	HDA
Hubs, frt wheels locking	N/A	N/A	OEM std.
Wheels, dia.	16 in./single	16 in./dual rear	16 in./single
Tires, type/tread, min.	LT235/R/AS	LT215/R/AS	LT235/R/AT
Alternator amp/battery CCA	130/750	130/600	130/600
Fuel capacity, min., 1 (gal.)	143 (38)	97 (26)	143 (38)
Body, utility, style	low-open	low-open	low-open
Body length, m (ft)	2.4 (8)	2.7 (9)	2.4 (8)
Cabinet vol. per side, M3 (IN3)	.47 (29,000)	.47 (29,000)	.47 (29,000)
Mirrors	low mount	RM	RM
Body mounting	Std.	Std.	ORM
4 X 4			
ITEM NO.	82C	88C	89C
PAYOUTLOAD min, kg (lb)	1179(2,600)	2312 (5,100)	1814 (4,000)
GVWR min./max, kg (lb)	4081 (9,000)/ 4489 (9,900)	4172 (9,200)/ 4489 (9,900)	4988 (11,000)/ 5668 (12,500)
Cab to axle (CA) cm (in.)	142 (56)	142 (56)	152 (60)
Engine, min. CD/cyl.	5.4L/8	5.4L/8	5.4L/8
Transfer case	N/A	N/A	2 spd.
Suspension/shocks	HDA	HDA	HDA
Hubs, frt wheels locking	N/A	N/A	OEM std.
Wheels, dia.	16 in./single	16 in./dual rear	16 in./single
Tires, type/tread, min.	LT235/R/AS	LT215/R/AS	LT235/R/AT
Alternator amp/battery CCA	130/750	130/600	130/600
Fuel capacity, min., 1 (gal.)	143 (38)	97 (26)	151 (40)
Body, utility, style	low-open	low-open	low-open
Body length, m (ft)	2.4 (8)	2.7 (9)	2.4 (8)
Cabinet vol. per side, M3 (IN3)	.47 (29,000)	.62 (38,000)	.47 (29,000)
Mirrors	low mount	RM	RM
Body mounting	Std.	Std.	ORM

Extended Warranty Coverage may be available on these vehicles. Refer to New Vehicle Guide Warranty Section.

NOTES: It is highly recommended that option D3, special traction rear axle, be ordered for vehicles frequently used in 4 wheel drive application.

**Indicates sole source item.

TABLE 19: Utility Service, Extended Cab, 4X2 and 4X4

4 X 2		4 X 4	
ITEM NO.	84H**	84J**	89H**
PAYOUT min., KG (LB)	3,120 (6,880)	4,072 (8,980)	2,893 (6,380)
GWWR min/max., KG (LB)	6,802 (15,000)/ 7,482 (16,000)	7,709 (17,000)/ 9,069 (19,999)	6,802 (15,000)/ 7,482 (16,000)
Engine, min. CD/cyl.	6.8L/8-10	6.8L/8-10	6.8L/8-10
Transfer case	N/A	N/A	2 spd. 2 spd.
Suspension/shocks	HDA	HDA	HDA
Hubs, frt. wheel locking	N/A	N/A	OEM std
Wheels, dia.	19.5 in. w/dual rear	19.5 in. w/dual rear	19.5 in. w/dual rear
Tires, type/tread, min.	Commercial 225R LR-F AS	Commercial 225R LR-F AS	Commercial 225R LR-F AS-F TT-R
Alternator/battery	130/750	130/750	130/750
Fuel capacity, min., 1 (gal)	151 (40)	151 (40)	151 (40)
Body, utility, style & size, M (FT)	high-open	high-open	high-open
Body length, m (ft)	2.7 (9)	3.3 (11)	2.7 (9)
Cabinet vol. per side, m ³ (in ³)	.62 (38,000)	122 (74,000)	.62 (38,000)
Mirrors	RM	RM	RM
Body mounting	Std	Std	ORM


Extended Warranty Coverage may be available on these vehicles. Refer to New Vehicle Guide Warranty Section.

NOTES: It is highly recommended that option D3, special traction rear axle, be ordered for vehicles frequently used in 4 wheel drive application.

**Indicates sole source item.

REPRESENTATIVE VEHICLES

TABLE 19: Utility Service, Extended Cab, 4X2 and 4X4

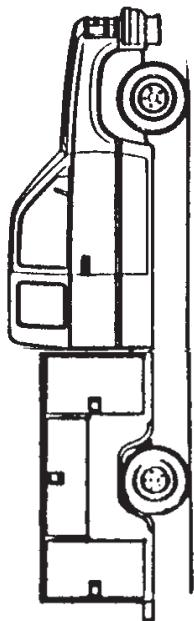

4 X 2

ITEM:	82C**	83C	84C	84H**	84J**
FORD (F)	F250	F350 (T6 N/A W/STD ENG in CA)	F350 (NA w/STD ENG & T6 in CA)	F450	F550
GM (G)	-	C2500HD	C3500	-	-
Body length					
2.4 m (8 ft.)					
Ford	X20w/66D	X30w/66D	-	-	-
GM (G)	-	C25953HD w/ZW9	-	-	-
2.7 m (9 ft.)					
Ford	-	X34	X36	X46	X56
GM	-	-	C36453	-	-

**Sole Source Item

4 X 4

ITEM:	87C**	88C	89C	89H**	89J**
FORD (F)	F250	F350 (T6 N/A W/STD ENG in CA)	F350 (T6 NA w/STD ENG in CA)	F450	F550
GM (G)	-	K2500HD	K3500 ¹	-	-
Body length		Model codes			
2.4 m (8 ft.)					
Ford	X21 w/66D	X30 w/66D	-	-	-
GM (G)	-	K25953HD w/ZW9	-	-	-
2.7 m (9 ft.)					
Ford	-	X31	X37	X47	X57
GM	-	-	K36453	-	-

**Indicates sole source item.

THIS PAGE HAS BEEN INTENTIONALLY LEFT BLANK

TABLE 19: Utility Service, Extended Cab, 4X2 and 4X4

OPTIONAL EQUIPMENT: O = Option available O** = Sole source S = Standard on specified item

OPTION CODES	4X2				4X4				89H*			
	82C*	83C	84C	84H**	84J**	84K**	87C**	88C	89C	89H**	89J*	
AL Aluminum maintenance body	0	0	0	0	0	0	0	0	0	0	0	
AT All-terrain/on-off road tires	0	0	0	-	-	-	S	S	S	-	-	
B09 Service body 2.7 m (9 ft) req. CA6	-	0** (F)	S	S	S	-	0** (F)	S	S	S	S	
B11 Service body 2.7 m (11 ft) req. CA8	-	-	0** (G)	-	-	-	0** (G)	-	-	-	-	
BBM Front bulkhead, cab guard	0	0	0	0	0	0	0	0	0	0	0	
BHP High profile body	0	0	0	0	0	0	0	0	0	0	0	
BF Solid front bench seat	0** (F)											
BUA Backup alarm	0	0	0	0	0	0	0	0	0	0	0	
CA6 152cm (60 in.) cab to axle (CA)	-	0** (F)	S	S	S	-	0** (F)	S	S	S	S	
CA8 3.4m (11 ft) body with 212 cm (84")CA	-	-	0** (G)	-	-	-	-	0** (G)	-	-	-	
CM Carpet floor covering	0	0	0	0	0	0	0	0	0	0	0	
CNS Consignee delivery	0	0	0	0	0	0	0	0	0	0	0	
CRTS Cruise control/tilt steering	0	0	0	0	0	0	0	0	0	0	0	
CU Cloth upholstery	0	0	0	0	0	0	0	0	0	0	0	
D3 Special traction, rear *	0	0	0	0	0	0	0	0	0	0	0	
D7 Towing/mountain ratio	0	0	0	0	0	0	0	0	0	0	0	
DA Delete air conditioning	0	0	0	0	0	0	0	0	0	0	0	
DRL Daytime running lights	0	0	0	0	0	0	0	0	0	0	0	
E5 Eighteen cylinder, extra power, min. 6.8 L.	0	0	0	0	S	S	0	0	S	S	S	
EH Block heater, OEM (std. with YD)	0	0	0	0	0	0	0	0	0	0	0	
FG Fiberglass maintenance body	0	0	0	0	0	0	0	0	0	0	0	
FTH Front tow hooks	-	-	-	-	-	-	0** (G)	0	0	0	0	
HTG Hydraulic lift gate, N/A Ford w/ 8 ft. body	-	0** (G)	0	0	0	0	-	0** (G)	0	0	0	
HTP Power close lift gate (use only w/HTG) req. 9 ft or longer body	-	0	0	0	0	0	-	0	0	0	0	
J560 7-way trailer electrical receptacle	0	0	0	0	0	0	0	0	0	0	0	
MBG Brush guard, front	0	0	0	0	0	0	0	0	0	0	0	
MHP Pipe and conduit holder (w/UOR or URO)	0	0	0	0	0	0	0	0	0	0	0	
MIL Military data plate	0	0	0	0	0	0	0	0	0	0	0	
MRS Strobe type warning light	0	0	0	0	0	0	0	0	0	0	0	
MPS Snow plow, reversible	-	-	0	0	0	0	0	0	0	0	0	
ORM Off-road body mounting	0	0	0	0	0	0	S	S	S	S	S	
FCI Paint compartment interior same as body exterior	0	0	0	0	0	0	0	0	0	0	0	
FSM Parts and service manuals	0	0	0	0	0	0	0	0	0	0	0	
PT PTO opening, req. E5	0	0	0	0	0	0	0	0	0	0	0	
PWL Power windows and locks	0	0	0	0	0	0	0	0	0	0	0	

** Indicates sole source item.

OPTIONAL EQUIPMENT

O = Option available O = Sole source S = Standard on specified item**

OPTION CODES	4 X 2				4 X 4*				
	82C**	83C	84C	84H**	84J**	87C**	88C	89C	89H**
RACS AM/FM radio w/integral cassette player	0	0	0	0	0	0	0	0	0
RAD AM/FM radio w/ integral CD player	0	0	0	0	0	0	0	0	0
RH4 Class 4; draw bar receiver (OEM)	0	0	0	0	0	0	0	0	0
RKE Remote keyless entry	0	0	0	0	0	0	0	0	0
RS Reclining bucket/captains chair seats	0	0	0	0	0	0	0	0	0
SK Metric odometer	0	0	0	0	0	0	0	0	0
SP Skid plates	-	-	-	0	0	0	0	0	0
SRG Sliding rear window	0	0	0	0	0	0	0	0	0
SZ Snowplow prep. package, OEM	-	-	0	0	0	0	0	0	0
T5 5 speed transmission	-	0***(G)	0***(G)	-	0***(G)	0	0	0	0
T6 6 speed manual transmission (G REQ E5 or YD)	0	0	0	0	0	0	0	0	0
TT Traction tread rear tires (commercial tire)	-	-	0	0	-	-	-	S	S
UFT Top opening compartments (NA w/FG, AL, USS, UTR, UPR), (N/A w/ codes USS and UPR)	0	0	0	0	0	0	0	0	0
ULCL Long horizontal compartment - left	0	0	0	0	0	0	0	0	0
ULCR Long horizontal compartment - right	0	0	0	0	0	0	0	0	0
UOR Overhead racks w/ladder clamps (N/A w/USS), (requires BHP)	0	0	0	0	0	0	0	0	0
UPR Pipe track on top right side (requires BHP)	0	0	0	0	0	0	0	0	0
URH Rope hooks	0	0	0	0	0	0	0	0	0
USS Superstructure, closed body (requires BHP)	-	0	0	0	0	0	0	0	0
USS2 Superstructure, extra height (requires BHP)	-	0	-	0	0	-	0	0	0
USM Side mounted ladder rack (w/USS, USS2 only)	0	0	0	0	0	0	0	0	0
UTC Tire carrier, vertical in load space cover (N/A w/UTR)	0	0	0	0	0	0	0	0	0
UTR Telescoping load space cover	0	0	0	0	0	0	0	0	0
UVB Vise bracket and pipe rest	0	0	0	0	0	0	0	0	0
WA Wide track axle	-	-	0	-	-	-	0	-	-
XW Extra wide load space, min. 140 cm (54 in.), includes WA	-	0	-	-	0	0	0	0	0
YD Diesel engine, turbocharged (EH std.)	0	0	0	0	0	0	0	0	0

NOTE: It is highly recommended that option D3, special traction rear axle, be ordered for vehicles frequently used in 4 wheel drive application.

**Indicates sole source item.


TABLE 19: Utility Service, Extended Cab, 4X2 and 4X4

TABLE 20: Utility Service, Crew Cab, 4X2 and 4X4

The vehicle shall meet the requirements shown previously for utility service trucks. The vehicle shall be provided with 4 door crew cab.

The equipment listed below shall be the minimum furnished on all vehicles listed in this table.

Style, Cab - 4 Door	Wheelbase - as required for proper load distribution	Cooling system - HDA
Engine type - Gas	Seating capacity, min. - 5 Pass.	
Transmission - Auto	Radio - AM/FM	
Differential, ratio - OEM std.	Air conditioning	
Brakes, Type - Power ABS on all Wheels	Intermittent wipers	
Steering - Power	Bumper, rear type - h.d. step w/RH2 (1.9cm. [.75in]hole)	
Vinyl upholstery	Rubber floor covering	
Split front bench seat		

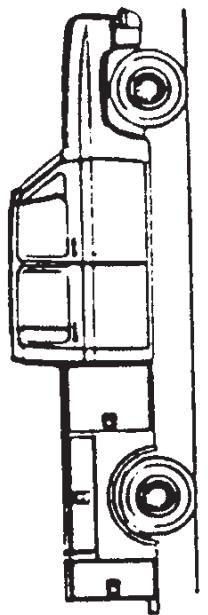

4 X 2

ITEM NO.	141	142	144	144A**	144B**	146**	147	149	149A**	149B**
PAYOUTLOAD min., KG (LB)	1134 (2,500)	1269 (2,800)	1905 (4,200)	2857 (6,300)	4309 (9,500)	907 (2,000)	1134 (2,500)	1814 (4,000)	3175 (7,000)	4092 (9,000)
GVWR min./max., KG (LB)	3900 (8,600)/ 4081 (9,000)	4172 (9,200)/ 4489 (9,900)	4988 (11,000) 5668 (12,500)	6802 (15,000) 7482 (16,000)	7709 (17,000) 9069 (19,999)	3900 (8,600) 4081 (9,000)	4172 (9,200) 4489 (9,900)	4988 (11,000) 5668 (12,500)	6800 (15,000) 7256 (16,000)	7936 (17,500) 9069 (19,999)
Engine, min. CD/cyl.	5.4 L/8	5.4 L/8	6.8L/8-10	6.8L/8-10	6.8L/8-10	5.4 L/8	5.4L/8	5.4L/8	6.8L/8-10	6.8L/8-10
Transfer case	N/A	N/A	N/A	N/A	N/A	2 spd.	2 spd.	2 spd.	2 spd.	2 spd.
Suspension/shocks	HDA	HDA	HDA w/aux. rears	HDA w/aux. rears	HDA w/aux. rears	HDA	HDA	HDA	HDA	HDA
Alternator amp/battery CCA r	130/750	130/600	130/750	130/600	130/600	130/750	130/600	130/600	130/750	130/750
Hubs, ft. wheels locking	N/A	N/A	N/A	N/A	N/A	OEM std.	OEM std.	OEM std.	OEM std.	OEM std.
Wheels, dia.	16 in./single	16 in./dual	16 in./dual	19.5 in./dual	19.5 in./dual	16 in./single	16 in./single	16 in./dual	19.5 in./dual	19.5 in./dual
Tires, type/tread, min.	LT235/R/AS	LT235/R/AS	LT215/R/AS	225/R/AS	225/R/AS	LT235R/AT	LT235R/AT	LT215R/OO	LT215R/OO	LT215R/OO
Body, utility, style	Low-open	Low-open	High-open	High-open	Commercial	Commercial	Low-open	Low-open	Commercial	Commercial
Body length, m (ft)	2.4 (8)	2.4 (8)	2.7 (9)	2.7 (9)			2.4 (8)	2.4 (8)	2.7 (9)	2.7 (9)
Fuel capacity, min., L (GAL)	128 (34)	128 (34)	128 (34)	128 (34)		Std.	Std.	128 (34)	128 (34)	128 (34)
Body mounting	Std.	Std.	Std.	Std.	Std.	ORM	ORM	ORM	ORM	ORM

Extended Warranty Coverage may be available on these vehicles. Refer to New Vehicle Guide warranty section.

NOTE: It is highly recommended that option D3, special traction rear axle, be ordered for vehicles frequently used in 4 wheel drive application.

REPRESENTATIVE VEHICLES

4 X 2			4 X 4		
ITEMS:	141	142	144A**	144B**	146**
Ford (F)	F250	F350 (N/A w/STD ENG & T6 in CA)	F450	F550	F250
GM (G)	-	2500HD	3500	-	GM (G)
Model Codes					Model Codes
Ford	W20 w/66D	W30 w/66D	W46	W56	Ford
GM (G)	-	CC25943HD w/ZW9	CC35943 w/ZW9	-	GM (G)

**Indicates sole source item.


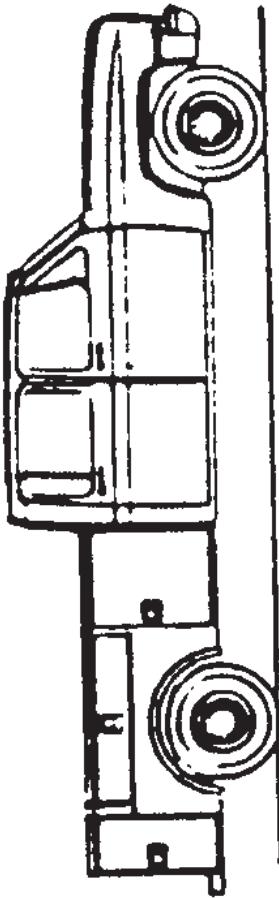


TABLE 20: Utility Service, Crew Cab, 4X2 and 4X4

TABLE 20: Utility Service, Crew Cab, 4X2 and 4X4**OPTIONAL EQUIPMENT:**

O = Option available

S = Standard on specified item

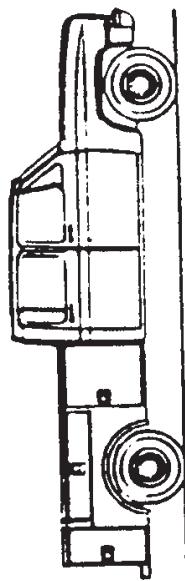

OPTION CODES	4 X 2				4 X 4			
	141**	142	144	144A**	144B**	146**	147	149
AH Aux. rear compartment heater	0	0	0	0	0	0	0	0
AL Aluminum maintenance body	0	0	0	0	0	0	0	0
AT All-terrain/on-off road tires	0	0	0	-	-	S	S	-
B09 Service body 2.7 m (9 ft.) req. CA6	-	0** (F)	0** (F)	S	S	-	0** (F)	0** (F)
BBM Front bulkhead, cab guard	0	0	0	0	0	0	0	0
BF Solid front bench seat	0** (F)	0*** (F)	0** (F)	0** (F)	0** (F)	0** (F)	0** (F)	0** (F)
BHP High profile body	0	0	0	S	S	0	0	S
BUA Backup alarm	0	0	0	0	0	0	0	0
CA6 152 cm (60 in.), cab to axle (CA)	-	0*** (F)	0*** (F)	S	S	-	0** (F)	0** (F)
CM Carpeted floor covering	0	0	0	0	0	0	0	S
CNS Consignee delivery	0	0	0	0	0	0	0	0
CRTS Cruise control/tilt steering	0	0	0	0	0	0	0	0
CU Cloth upholstery	0	0	0	0	0	0	0	0
D3 Special traction rear *	0	0	0	0	0	0	0	0
D7 Towing/mountain ratio	0	0	0	0	0	0	0	0
DA Delete air conditioning	0	0	0	0	0	0	0	0
DRL Daytime running lights	0	0	0	0	0	0	0	0
E5 Eight/ten cylinder, extra power, min. 6.8 L.	0	0	S	S	S	S	S	S
EH Block heater, OEM (STD. w/YD)	0	0	0	0	0	0	0	0
FG Fiberglass maintenance body	0	0	0	0	0	0	0	0
FTH Front tow hooks	-	-	-	-	0	0	0	0
HTG Hydraulic lift gate, N/A Ford w/ 8 ft. body	-	0	0	0	-	0	0	0
HTP Power close lift gate (use only w/HTG) (req. 9 ft. or longer body)	-	0	0	0	-	0	0	0
J560 7-way trailer electrical receptacle	0	0	0	0	0	0	0	0
MBG Brush guard, front	0	0	0	0	0	0	0	0
MHP Pipe and conduit holder (w/UOR or URO)	0	0	0	0	0	0	0	0
MIL Military data plate	0	0	0	0	0	0	0	0
MPS Snow plow, reversible	-	-	-	-	0	0	0	0
MRS Strobe type warning light	0	0	0	0	0	0	0	0
ORM Off-road body mounting	0	0	0	0	0	S	S	S
PCI Paint compartment interior same as exterior of body	0	0	0	0	0	0	0	0
PSM Parts and service manuals	0	0	0	0	0	0	0	0
PT PTO opening (requires E5)	0	0	0	0	0	0	0	0
PWL Power windows and locks	0	0	0	0	0	0	0	0
RACS AM/FM radio w/integral cassette player	0	0	0	0	0	0	0	0

**Indicates sole source item.

OPTIONAL EQUIPMENT T: (continued)

O = Option available S = Standard on specified item

OPTION CODES	4 X 2				4 X 4					
	141**	142	144	144A**	144B**	146**	147	149	149A**	149B**
RAD AM/FM radio w/integral CD player	0	0	0	0	0	0	0	0	0	0
RH4 Class 4 draw bar receiver	0	0	0	0	0	0	0	0	0	0
RKE Remote keyless entry	0	0	0	0	0	0	0	0	0	0
RM Camper mirrors	0	0	S	S	S	0	0	S	S	S
RS Reclining bucket/captains chair seats	0	0	0	0	0	0	0	0	0	0
SK Metric odometer	0	0	0	0	0	0	0	0	0	0
SP Skid plates	-	-	-	-	-	0	0	0	0	0
SRG Sliding rear window	0	0	0	0	0	0	0	0	0	0
SZ Snow plow prep package (OEM)	-	-	-	-	0	0	0	0	0	0
T6 6 speed manual transmission	0	0	0	0	0	0	0	0	0	0
TT Traction tread rear tires (commercial)	-	-	0	0	-	-	-	S	S	S
UFT Top opening compartments (N/A w/BHP, FG, AL, VSS, UTR, VPR)	0	0	0	0	-	0	0	0	-	-
ULCL Long horizontal compartment - left	0	0	0	0	0	0	0	0	0	0
ULCR Long horizontal compartment - right	0	0	0	0	0	0	0	0	0	0
UOR Overhead racks w/ladder clamps (N/A w/USS)	0	0	0	0	0	0	0	0	0	0
UPR Pipe rack on top right side	0	0	0	0	0	0	0	0	0	0
URH Rope hooks	0	0	0	0	0	0	0	0	0	0
USM Side mounted ladder rack (w/USS, USS2 only)	0	0	0	0	0	0	0	0	0	0
USS Superstructure, closed body (req. BHP)	0	0	0	0	0	-	0	0	0	0
USS2 Superstructure, extra height (req. BHP)	-	0	0	0	0	-	0	0	0	0
UTC Tire carrier, vertical in load space cover (N/A w/UTR)	0	0	0	0	0	0	0	0	0	0
UTR Telescoping load space cover (N/A with codes USS and UPR)	0	0	0	0	0	0	0	0	0	0
UVB Vise bracket and pipe rest	0	0	0	0	0	0	0	0	0	0
WA Wide track rear axle	-	-	0	-	-	-	0	-	-	-
XW Extra wide load space, min. 140 cm (54 in), includes WA	-	-	0	-	-	-	0	-	-	-
YD Diesel engine, turbocharged EH STD.	0	0	0	0	0	0	0	0	0	0

NOTE: It is highly recommended that option D3, special traction rear axle, be ordered for vehicles frequently used in 4 wheel drive application.
**Indicates sole source item.

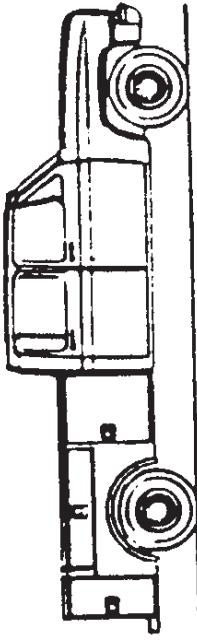


TABLE 20: Utility Service, Crew Cab, 4X2 and 4X4